


OEM Peristaltic Pump Without Drive


T-S107&JY15-12

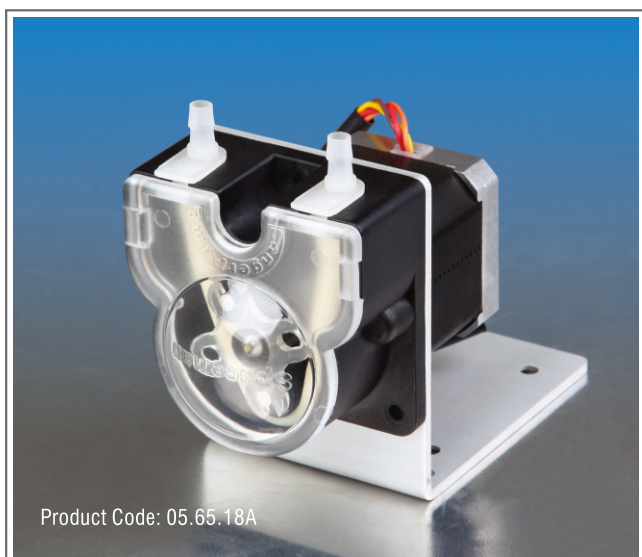

Product Code: 05.65.18A

Use JY15-12 pump head and step motor.
Ideal OEM peristaltic pump for equipment and instruments.
Soleplate installation is standard, panel installation is optional.

Max. Flow Rate

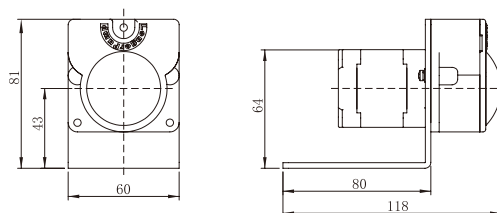

Pump Specification

Speed	≤ 100rpm
Dimension (L × W × H)	118 × 60 × 81 (mm)
Relative humidity	< 80%
Operating temperature	0 to 40°C

Tubing	Max. Flow Rate (mL/min)
25"	118mL/min
17"	170mL/min

Motor Specifications

Step angle	1.8°
Phase	2
Phase voltage	6.56V
Phase current	0.8A
Resistance	8.2Ω ± 10%
Inductance	13.8mH ± 20%

Motor Port

Line Color	Definition
Brown	A
Orange	$\bar{A}$
Red	B
Yellow	$\bar{B}$

T-S201 OEM Peristaltic Pump Without Drive




Product Code: 05.65.32A

Max. Flow Rate



Use step motor. Standard pump head mounting bracket can be fitted with several different pump heads.
Ideal OEM peristaltic pump for equipment and instruments.
Soleplate or panel installation.

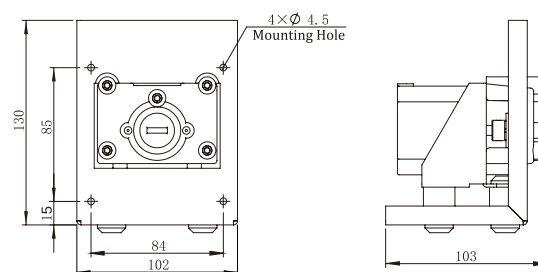

Pump Specification

Speed with DG pump head	≤ 100rpm
Speed with other pump head	≤ 300rpm
Dimension (L × W × H)	103 × 102 × 130 (mm)
Relative Humidity	< 80%
Operating Temperature	0 to 40°C

Motor Specifications

Step angle	1.8°
Phase	2
Phase voltage	2.1V
Phase current	1.5A
Resistance	1.4Ω ± 10%
Inductance	4.3mH ± 20%

Motor Port

Line Color	Definition
Red	A
Green	$\bar{A}$
Yellow	B
Blue	$\bar{B}$