Fiber Optic ATR-Probe for Lab Applications


art photonics



Our new designed IR fiber ATR probes with PEEK shaft are cost effective and perfect for use in small lab reactors and open vessels.
All ATR probes from FlexiSpec® product line are compatible to any type of FT-IR and other IR-spectrometers, photometers and sensors.

Applications:

- Reaction Monitoring in real time
- Remote Polymerization Control
- Crystallization Process Screening
- In-situ IR-Spectroscopy for soft surfaces, pastes and liquids

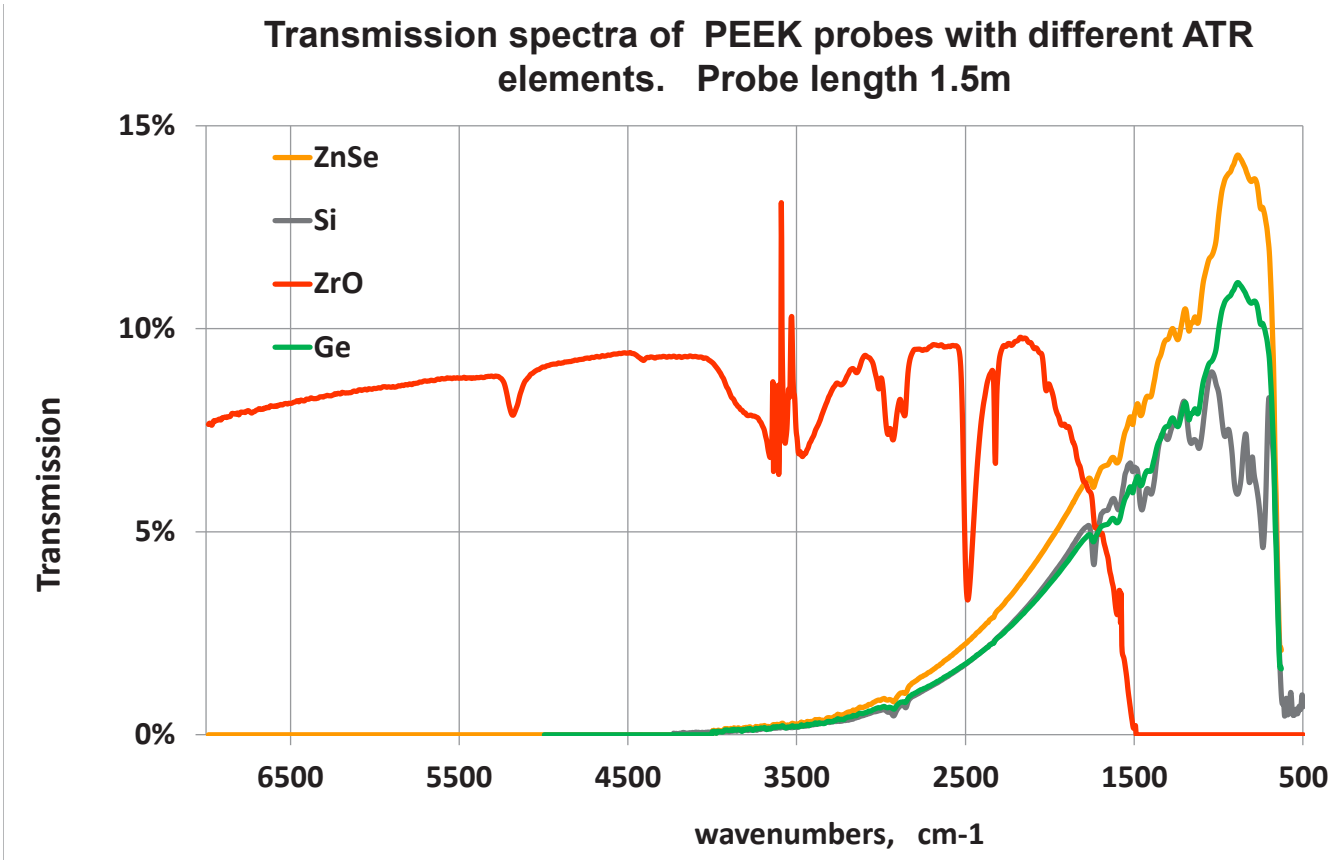


Specification of Fiber Optic ATR-Probes for lab application *FlexiSpec*®

Type of ATR element	ZnSe	Ge	Si	ZrO
Transmission range	3.2-17µm (3100-600cm-1)	3.2-17µm (3100-600cm-1)	3.2-17µm (3100-600cm-1)	1.1-6.5µm (9000-650cm-1)
Fiber type	PIR-900/1000	PIR-900/1000	PIR-900/1000	CIR-500/550
Temperature range	-100°C / +140°C	-100°C / +140°C	-100°C / +140°C	-100°C/ +90°C
Pressure (max)	7 Bar	7 Bar	7 Bar	7 Bar

Common Parameters of Fiber Optic ATR-Probes *FlexiSpec*®

Total Length	1.5m (opt.: 1m to 5m)
Shaft Length	150mm (opt.: 100mm to 500mm)
Shaft Diameter	6.3mm
Shaft Material	PEEK (polyetheretherketone)
Length of Legs	500mm (opt.: 200 - 500mm)
Protective Tube Material	PEEK
Minimal Bending Radius	130mm
Input / Output Connectors	Long SMA (opt.: any other type)



20140825-DE

Aurora Pro SCIENTIFIC

Aurora Pro Scientific (US partner)
103 Godwin Ave, Suite 133 Midland Park, NJ 07432, USA
sales@auroraprosci.com
www.auroraprosci.com