
OEM Fixed Speed Peristaltic Pump


Max. Flow Rate

10000 mL/min

5000 mL/min

90-1 Series

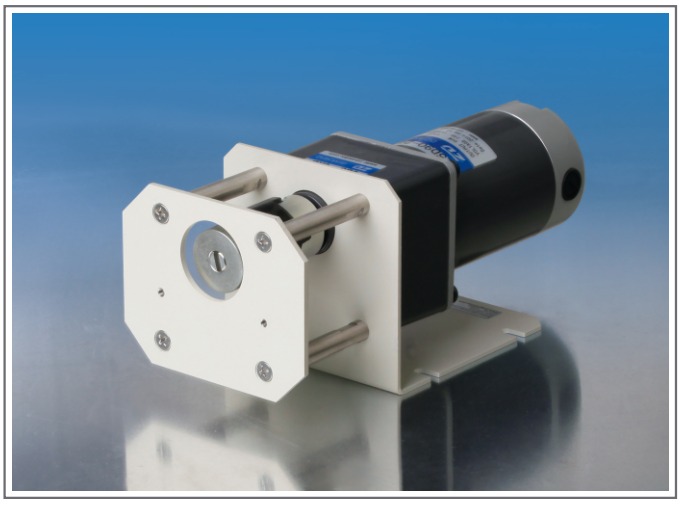


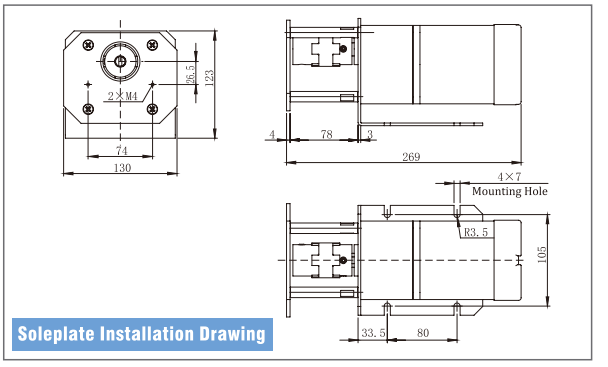

Soleplate Installation Drawing

Pump Head KZ25



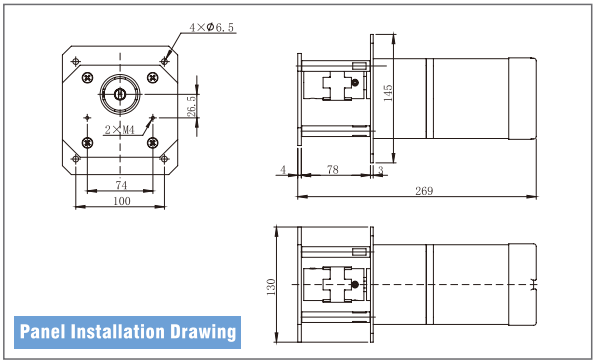

Panel Installation Drawing

Model	Installation Mode	Product Code	Speed (rpm)	Motor	Power Supply	Speed Tolerance	Motor Life	Operating Temperature	Relative Humidity
G200-D5	Soleplate Panel	05.51.411	200	90 DC gear motor	DC 12V/90W	≤±10%	2000 hours	0 to 40°C	<80%
G200-D6	Panel	05.51.412	200						
G240-D5	Soleplate Panel	05.51.421	240						
G240-D6	Panel	05.51.422	240						
G333-D5	Soleplate Panel	05.51.521	333						
G333-D6	Panel	05.51.522	333						
G500-D5	Soleplate Panel	05.51.711	500						
G500-D6	Panel	05.51.712	500						
G200-D105	Soleplate Panel	05.53.411	200		DC 24V/90W				
G200-D106	Panel	05.53.412	200						
G240-D105	Soleplate Panel	05.53.421	240						
G240-D106	Panel	05.53.422	240						
G333-D105	Soleplate Panel	05.53.521	333						
G333-D106	Panel	05.53.522	333						
G500-D105	Soleplate Panel	05.53.721	500						
G500-D106	Panel	05.53.722	500						
G208-A5	Soleplate Panel	05.55.421	208	90 AC gear motor	AC 220V/90W		5000 hours		
G208-A6	Panel	05.55.422	208						
G250-A5	Soleplate Panel	05.55.431	250						
G250-A6	Panel	05.55.432	250						
G347-A5	Soleplate Panel	05.55.521	347						
G347-A6	Panel	05.55.522	347						
G417-A5	Soleplate Panel	05.55.611	417						
G417-A6	Panel	05.55.612	417						

Power Supply	DC 12V, DC 24V				AC 220V			
Speed(rpm)	200	240	333	500	208	208	347	417
Tubing	Flow Rate (mL/min)							
15#	600	720	999	1500	624	750	1041	1251
24#	1167	1400	1943	2917	1213	1458	2024	2433
35#	1667	2000	2775	4167	1733	2083	2892	3475
36#	2000	2400	3330	5000	2080	2500	3470	4170

Tel: +86 - 312 - 3110087 Fax: +86 - 312 - 3168553 Internet www.longerpump.com Email:longer@longerpump.com